

# Fixed Paddle Clips Quick Guide

[info@allenfield.co](mailto:info@allenfield.co)

800-225-0396

256A Orinoco Drive. Brightwaters, NY 11718


Our Fixed Paddle Connecting Clips are designed for customers who require a smooth assembly process that prevents the box walls from flexing and making it difficult to close and tighten the clips. Find the right clip for your package with this box packaging guide. Then [request a free sample!](#)



## Fixed Paddle Clips



### HP403

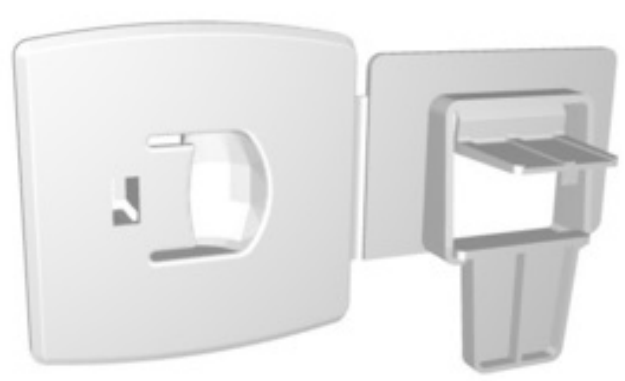

Stock Options  
Translucent


Max. Thickness of  
Corrugated Walls  
0.33"

Dimensions  
2.75" x 2.75"

#### Features

Our first fixed paddled interlock clip designed for single-wall corrugated boxes

### HP601S

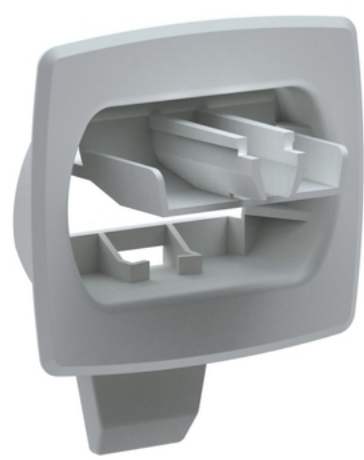

Stock Options  
Translucent

Max. Thickness of  
Corrugated Walls  
0.61"

Dimensions  
2.80" x 2.44"

#### Features

Upgrade of the HP601 clip with the extended stationary leg

### HP601D



Stock Options  
Translucent

Max. Thickness of  
Corrugated Walls  
0.79"

Dimensions  
2.80" x 2.44"

#### Features

Curved deep insert part with teeth on the locking paddles

### HP603



Stock Options  
Translucent, Black,  
Black with Up Arrow

Max. Thickness of  
Corrugated Walls  
0.65"

Dimensions  
3.00" x 1.96"

#### Features

Side-opened interlock design with the fixed paddle and optional arrow sign that indicates direction



[www.allenfield.com](http://www.allenfield.com)

800-535-0810

[info@allenfield.com](mailto:info@allenfield.com)