

Fixed Paddle Clips Quick Guide

info@allenfield.com

800-225-0396

256A Orinoco Drive. Brightwaters, NY 11718


Our Fixed Paddle Connecting Clips are designed for customers who require a smooth assembly process that prevents the box walls from flexing and making it difficult to close and tighten the clips. Find the right clip for your package with this box packaging guide. Then [request a free sample!](#)



Fixed Paddle Clips



HP403

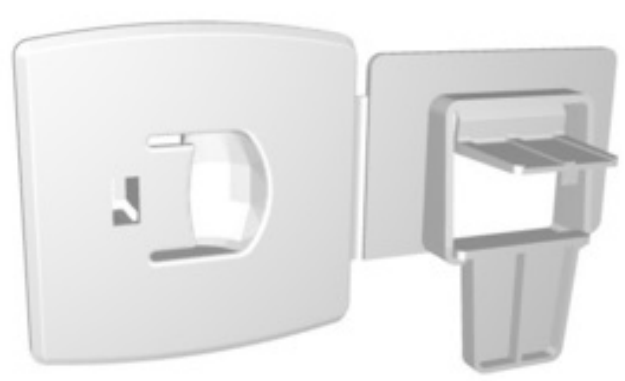

Stock Options
Translucent


Max. Thickness of Corrugated Walls
0.33"

Dimensions
2.75" x 2.75"

Features

Our first fixed paddled interlock clip designed for single-wall corrugated boxes

HP601S

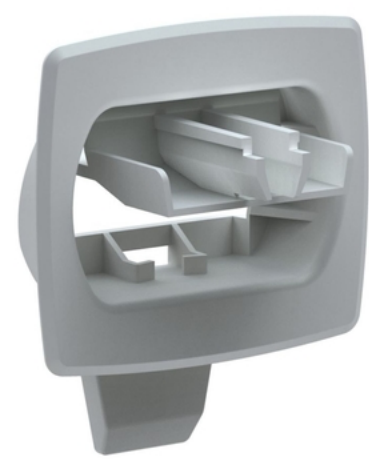

Stock Options
Translucent


Max. Thickness of Corrugated Walls
0.61"

Dimensions
2.80" x 2.44"

Features

Upgrade of the HP601 clip with the extended stationary leg

HP601D

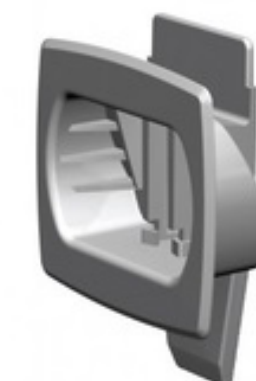

Stock Options
Translucent

Max. Thickness of Corrugated Walls
0.79"

Dimensions
2.80" x 2.44"

Features

Curved deep insert part with teeth on the locking paddles

HP603



Stock Options
Translucent, Black, Black with Up Arrow

Max. Thickness of Corrugated Walls
0.65"

Dimensions
3.00" x 1.96"

Features

Side-opened interlock design with the fixed paddle and optional arrow sign that indicates direction



www.allenfield.com

800-535-0810

info@allenfield.com