

Fixed Paddle Clips Quick Guide

info@allenfield.com

800-535-0810


1450 Bridgewater Rd. Bensalem, PA, 19020

Our Fixed Paddle Connecting Clips are designed for customers who require a smooth assembly process that prevents the box walls from flexing and making it difficult to close and tighten the clips. Find the right clip for your package with this box packaging guide. Then request a free sample!



Fixed Paddle Clips



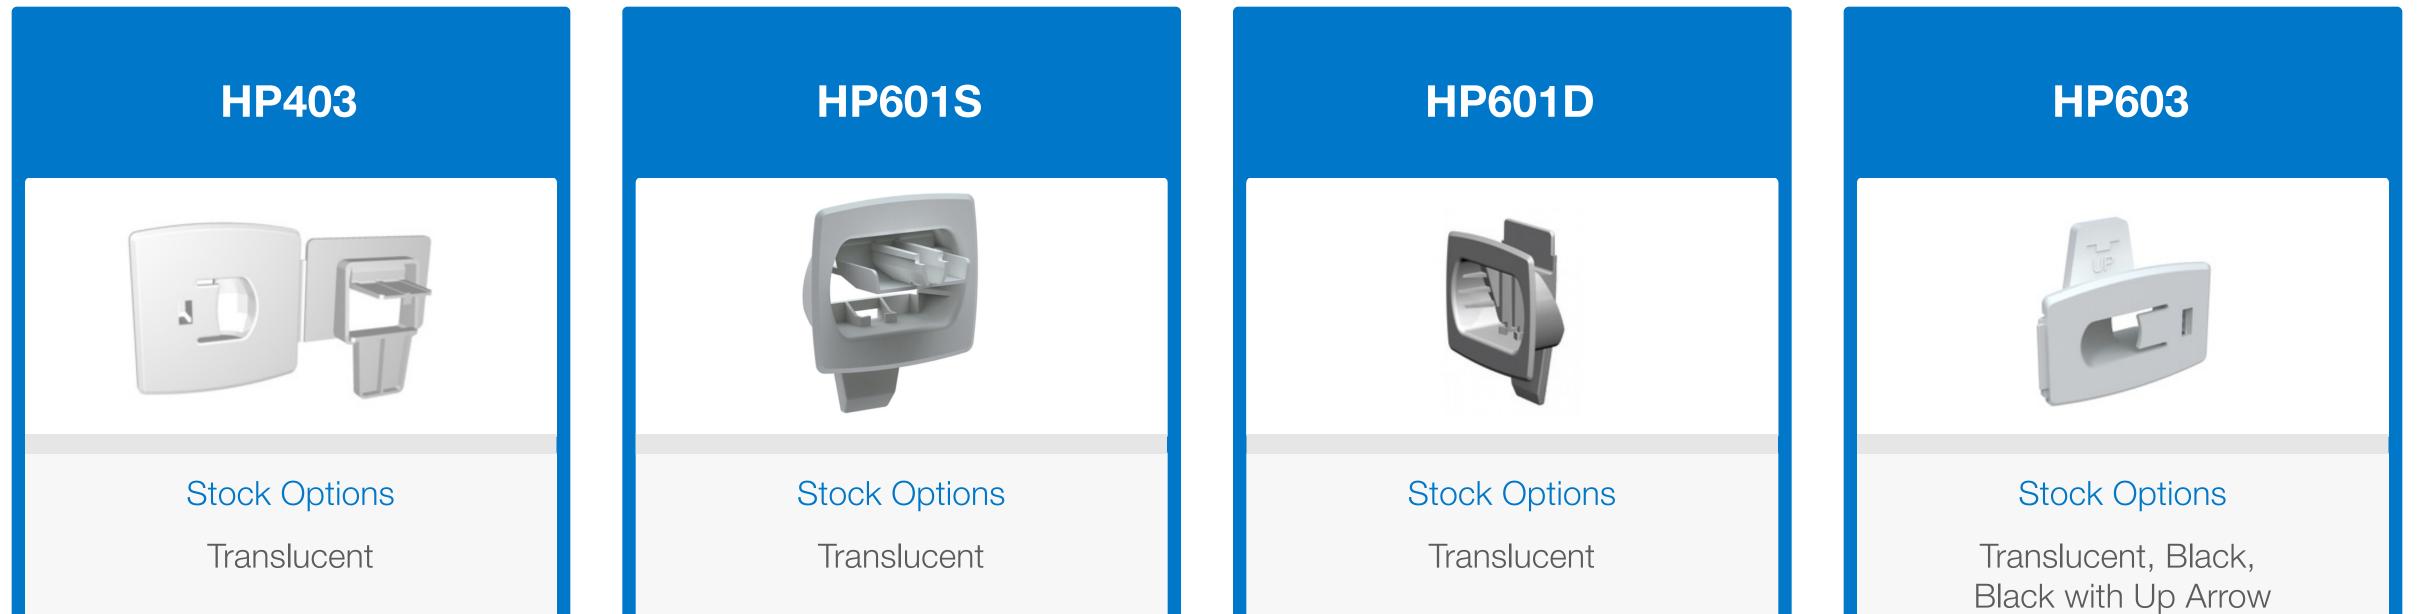

Max. Thickness of Corrugated Walls

0.33"

Dimensions 2.75" x 2.75"

Features

Our first fixed paddled interlock clip designed for single-wall corrugated boxes

Max. Thickness of Corrugated Walls 0.61"

> Dimensions 2.80" x 2.44"

Features

Upgrade of the HP601 clip with the extended stationary leg

Max. Thickness of Corrugated Walls 0.79"

> Dimensions 2.80" x 2.44"

Features

Curved deep insert part with teeth on the locking paddles

Max. Thickness of Corrugated Walls 0.65"

> Dimensions 3.00" x 1.96"

Features

Side-opened interlock design with the fixed paddle and optional arrow sign that indicates direction



info@allenfield.com www.allenfield.com 800-535-0810