

The HP Triplets Guide

info@allenfield.com

800-535-0810




256 A Orinoco Dr., Brightwaters, NY 11718

Allen Field's HP box connecting clips are designed to connect multiple corrugated box walls and make access to and removal from the box faster and easier. The [HP602W](#) and [HP603](#) are both used to secure double-wall corrugated boards but unlike the 602W, the 603 features an extended stationary tab, which improves the grip of the inner and outer panels, decreasing any separation of the corrugated walls. For these reasons, the 603 is recommended for customers who are packaging heavier or delicate contents. The [HP602W-10mm](#) is a single-wall version of the 602W, designed to accommodate corrugated box walls up to 0.39" thick. Finding the box clip to meet your packaging needs is of paramount importance to us here at the Allen Field Company. Call a packaging expert at [800-535-0810](tel:800-535-0810) and request free samples to test with your carton!



The HP Triplets

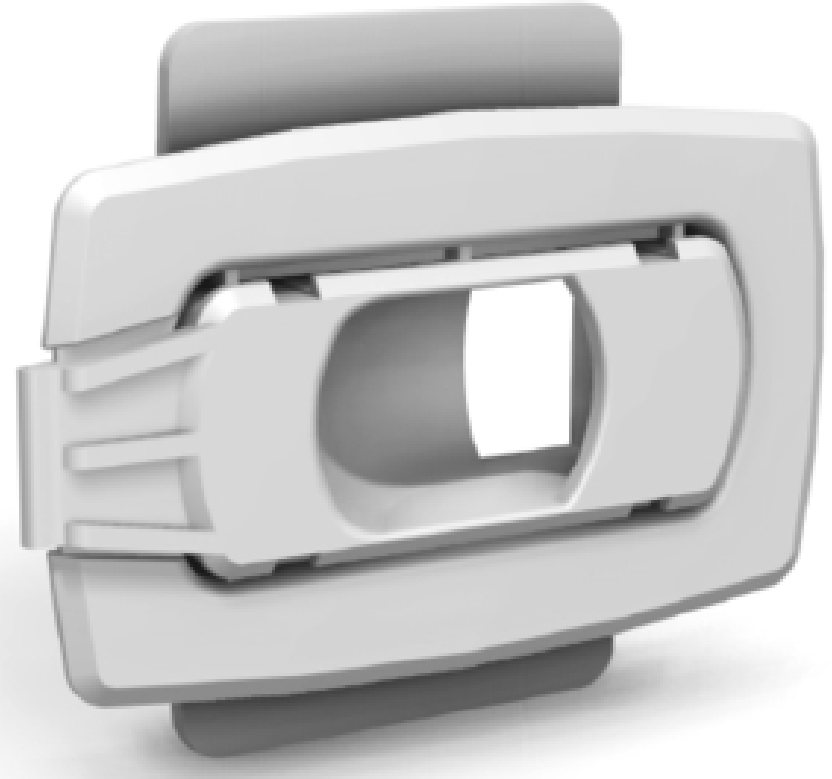

HP602W-10mm	HP602W	HP603
		
<p>Item Name Single-Wall Clip</p>	<p>Item Name Double-Wall Clip</p>	<p>Item Name Fixed Paddle Interlock Clip</p>
<p>Max Board Thickness 0.39"</p>	<p>Max Board Thickness 0.65"</p>	<p>Max Board Thickness 0.65"</p>
<p>Stock Options Translucent</p>	<p>Stock Options Black, Translucent</p>	<p>Stock Options Black, Translucent, Up Arrow (Optional)</p>
<p>Dimensions 3.00"(W) x 1.90"(H)</p>	<p>Dimensions 3.00"(W) x 1.90"(H)</p>	<p>Dimensions 3.00"(W) x 1.96"(H)</p>
<p>Features Smooth assembly process for single-wall corrugated board</p>	<p>Features Smooth assembly process for double-wall corrugated board</p>	<p>Features Extended stationary tab for additional support to tight closing; Optional arrow sign for direction</p>