


Box Connecting Clip Selection Guide

Although this selection guide can direct you to a box connecting clip, ask one of our knowledgeable customer service reps which product works best with your packaging. Please refer to the item's spec sheet for proper cutout dimensions. Make sure to check the board thickness and total weight of your packaging before ordering the box clips.




Approximate Clip Thickness Range

Box Clip	Min. (Inch)	Max. (Inch)
HP602W-10MM	0.250	0.330
BC125	0.250	0.330
HP403	0.260	0.350
BC600	0.260	0.350
PP400SS	0.325	0.400
HP460WS	0.475	0.525
BC150	0.500	0.545
HP511	0.550	0.600
HP601S	0.570	0.640
PP902T	0.600	0.660
HP603	0.600	0.660
HP602W	0.600	0.660
HP601W	0.645	0.675
HP601WA	0.645	0.675
HP601D	0.750	0.830
HP601W3	0.900	1.100

Flute Size and Combination Chart

Flute Size (Inch)	A	B	C	E	A/B	B/C	A/C
	0.188	0.125	0.156	0.094	0.313	0.281	0.344
A	0.188	0.376	0.313	0.344	0.282	0.501	0.469
B	0.125	0.313	0.250	0.281	0.219	0.438	0.406
C	0.156	0.344	0.281	0.312	0.250	0.469	0.437
E	0.094	0.282	0.219	0.250	0.188	0.407	0.375
A/B	0.313	0.501	0.438	0.469	0.407	0.626	0.594
B/C	0.281	0.469	0.406	0.437	0.375	0.594	0.562
A/C	0.344	0.532	0.469	0.500	0.438	0.657	0.625

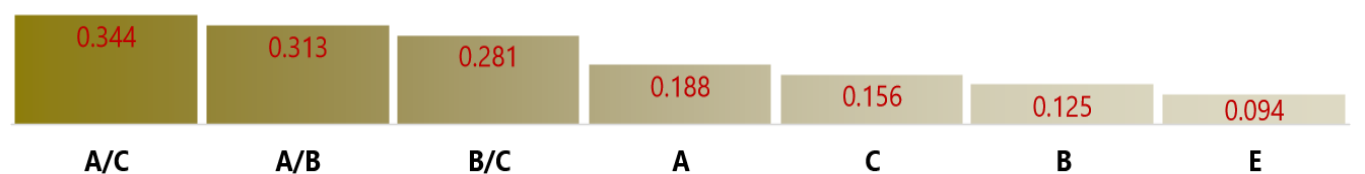

Box Connecting Clip Selection Guide

Flute	A	B	C	E	A/B	B/C	A/C
A	PP400SS HP602W-10MM	BC125 PP400SS	PP400SS HP602W-10MM	BC125	HP460WS BC150	HP460WS BC150	BC150 HP511 HP460WS
B	HP403 BC125	BC125	HP403 BC125	X	HP460WS	HP602W-10MM	HP460WS BC150
C	PP400SS HP602W-10MM	HP403 BC125	HP403 BC125	BC125	HP460WS BC150	HP460WS	HP460WS BC150
E	BC125	X	BC125	X	HP602W-10MM	HP602W-10MM PP400SS	HP602W-10MM
A/B	HP460WS BC150	HP460WS	HP460WS BC150	HP602W-10MM	HP601S HP603 HP602W PP902T	HP601S	HP601W HP601WA HP602W HP603 PP902T
B/C	HP460WS BC150	HP602W-10MM	HP460WS	HP602W-10MM PP400SS	HP601S	HP601S HP511	HP601S HP603 HP602W PP902T
A/C	BC150 HP511 HP460WS	HP460WS BC150	HP460WS BC150	HP602W-10MM	HP601W HP601WA HP602W HP603 PP902T	HP601S HP603 HP602W PP902T	HP601W HP601WA HP602W HP603 PP902T